



TABR Al Bonding Ribbon for Power Devices

パワーデバイス用Alボンディングリボン


Characteristics

- Excellent corrosion resistance (Equal to TANW wire)
- Corresponds to a multi size.
 - Width 0.5mm~2.5mm,
 - Thickness 0.05mm~0.3mm
- Satisfactory surface smoothness

特 徴

- 優れた耐湿性 (TANWワイヤ同等)
- 多寸法に対応
 - 幅 0.5mm~2.5mm
 - 厚さ 0.05mm~0.3mm
- 良好な表面平滑度

Overview of product




Winding / Spool = 50~100m / No.88
(It changes depending on the ribbon size.)



Winding / Spool = 100~300m / No.120
(It changes depending on the ribbon size.)

Loop Shape

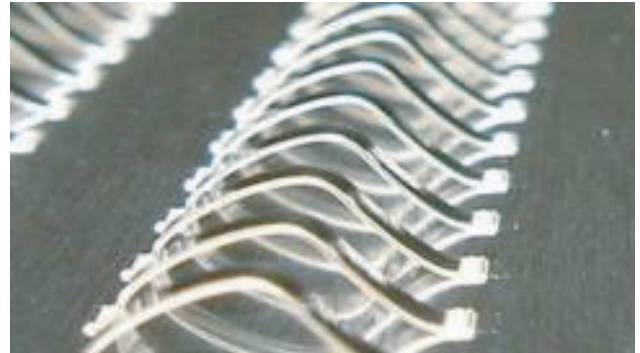

Ribbon Size: w2.0×t0.2 (mm)
Loop Length: 10mm

Cross Section TABR after PCT

Time (hrs)	20	100	1000
TABR			

Size: w2.0×t0.2 (mm)
PCT Conditions : at 121°C100% RH, 2atm

Corrosion doesn't progress